



P.A. - S.r.l. - EQUIPAGGIAMENTI TECNICI DEL LAVAGGIO

VIA MILANO, 13 - 42048 RUBIERA (REGGIO EMILIA) - ITALY - Tel. +39 0522 623611 (10 linee)
 Fax +39 0522 629600 - R.E.A. RE 156319 - Registro Imprese RE 11535 - Mecc. RE 013446
 C.F. e P. IVA 01035950359 - Cap. Soc. i.v. € 1.560.000,00 - Codice Identificativo C.E.E. IT 01035950359
 ART. 2497 - BIS C.C. DIREZIONE E COORDINAMENTO BENETTI srl R.I. TRIB. DI RE 01480690351
<http://www.pa-etl.it> - E-mail: info@pa-etl.it

GRUPPO BANCO POPOLARE DI VERONA E NOVARA SWIFT VRBPIT2V492



RB 65 – Adjustable spray wash gun for food industry - 24 bar – 2.4 MPa

Technical manual : E 123

Guns suitable for use up to 24 bar – 2.4 MPa rated pressure pumps.
 Shockproof gun with adjustable conical/pencil jet.

DN15



- **30.6400.00** RB65 G1/2 F
- **30.6425.00** RB65 w/SWIVEL G1/2 F
- **30.6430.00** Rotating hosebarb kit Ø13 mm
- **30.6440.00** RB65 G1/2 F
- **30.6445.00** RB65 w/SWIVEL G1/2 F

- Low pressure gun with conical/pencil jet controlled by the trigger.
- Adjustable screw to vary cone width from 0° to 60°
- Covered by semi-housings of non-stainable shockproof plastic, entirely sealed and with 3 rubber protective rings.
- Plastic trigger protected by hand guard.
- Minimum fatigue for trigger opening and use.
- Internal stricture in brass and Sst
- Ergonomic construction
- On request, inlet swivel connection.

TECHNICAL SPECIFICATIONS

P/N	RATED PRESSURE bar - MPa	MAX FLOW RATE L/min	(1) MAX TEMPERATURE	NOZZLE SIZE	INLET	WEIGHT gr
30.6400.00	24 – 2.4	60	90	0 - 60	G1/2 F	925
30.6425.00	24 – 2.4	60	90	0 - 60	G1/2 F	1045
30.6430.00	24 – 2.4	60	90	-	Ptgm Ø13 mm	56
30.6440.00	24 – 2.4	100	90	0 - 100	G1/2 F	-
30.6445.00	24 – 2.4	100	90	0 - 100	G1/2 F	-

(1) The gun has been designed for continuous use, at a water temperature of 60°C (140°F). It can resist at the max temperature of 90°C (195°F) for short periods only, as, when the gun shuts off, the heater continues to transmit the heat to the water, thus increasing both temperature and pressure up to high, dangerous values.

Using the gun at a water temperature higher than 60°C involves for the operator the use of adequate safety devices, such as gloves, glasses, etc.


Instruction manual, maintenance, installation, spare parts.

For a correct utilization, follow the directions of this manual

Re-print them on the Use and Maintenance booklet of the machine.

n. 12.9123.00

DIMENSIONAL DRAWING AND PRESSURE DROP CHART

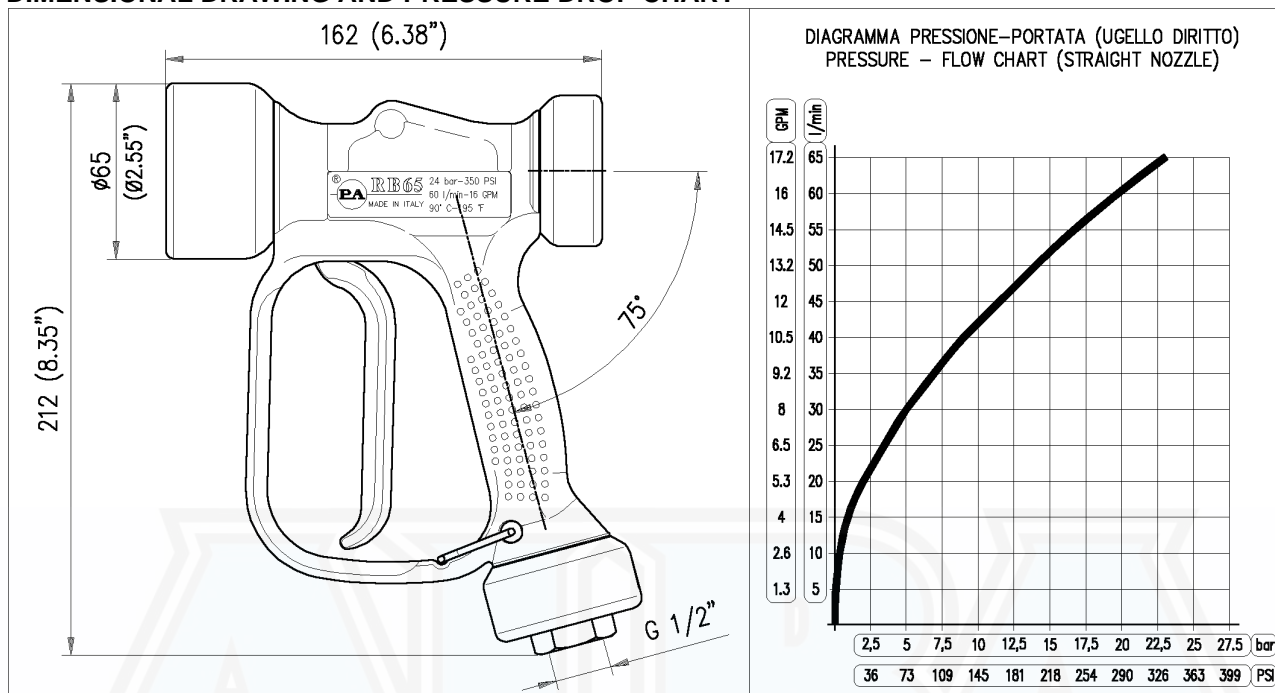

INSTRUCTIONS

This product is to be utilized with clean fresh water, even slightly additivated with normal detergents. For use involving different or corrosive liquids, contact the PA Technical department. Appropriate filtration should be installed when using unclean liquids. Choose the gun in line with the data of nominal running (system rated pressure, max flow and max temperature). In any case, the pressure of the machine should not exceed the permissible pressure rate imprinted on the gun.

INSTALLATION

This gun was designed to operate with **hot water** (in compliance with the technical specs). Provide the plant generating **hot water** with an equipment limiting the incidental increase of the fluid temperature.

Always fit a safety valve to protect the delivery conduct when the latter is under pressure.

Choose a suitable nozzle and adjust the valve mounted in the front of the gun, thus obtaining a constant supply and avoiding unpleasant pressure spike when closing the system.

If the nozzle wears out, the pressure falls. When you install a new nozzle, adjust the system back to the original pressure.

OPERATIONS

The gun opens and closes a high pressure conduct by means of a piston acting on a seat; the return is controlled by a spring which releases the trigger.

WATER HOSE FEED

By high or very unsteady pressure values on delivery, it is necessary to mount a pressure reducer, both to level the flow rate on delivery and to protect the system components.

PROBLEMS AND SOLUTIONS

PROBLEMS	PROBABLE CAUSES	SOLUTIONS
Leakage from the nozzle	Presence of impurities Gun seat worn out	Clean Replace seat Fit adequate filters and/or check
Leaking seals	Seals worn out	Replace seal
Difficult trigger opening	High pressure inside circuit	Control the bypass valve and adjust if necessary

REGULATIONS

The design and construction of our products comply with: norm CEI EN 60335-2-79 first edition, published in 1999-03 and its respective variations on the project norm prEN 1829.

Read this manual before starting the assembly.

For a correct utilization, follow the directions described in this manual and re-print them on the Use and maintenance manual of the machine.

The present manual is valid for all the guns named **RB65**.

SPARES

Use original PA spares only in order to get both a correct operation and a long lasting, reliable product.

MAINTENANCE

Maintenance has to be carried out by **Specialized Technicians**.

STANDARD: every 400 working hours (circa 10,000 cycles), check and lubricate the seals with water resistant grease.

SPECIAL: every 800 working hours(circa 20,000 cycles), check the wear of the seals and internal parts and if necessary, replace with original PA parts, taking care during installation to lubricate with water resistant grease.

CAUTION: re-assemble the gun restoring the original conditions.


The manufacturer is not to be considered responsible for damage as a result from incorrect fitting and maintenance.

Technical data, descriptions and illustrations are indicative and liable to modification without notice.

PARTS

30.6400.00 RB65 spray gun,brass 1/2F Bsp adj.nzl
30.6425.00 RB65 sp.gun,brass+sw.5 1/2F Bsp adj.nzl
30.6430.00 Swivel, brass -RB65+13mm h.barb

30.6440.00 RB65 sp.gun, brass 1/2F adj.nozzle -100
30.6445.00 RB65 sp.gun, brass+sw5 1/2F adjust.nozzle

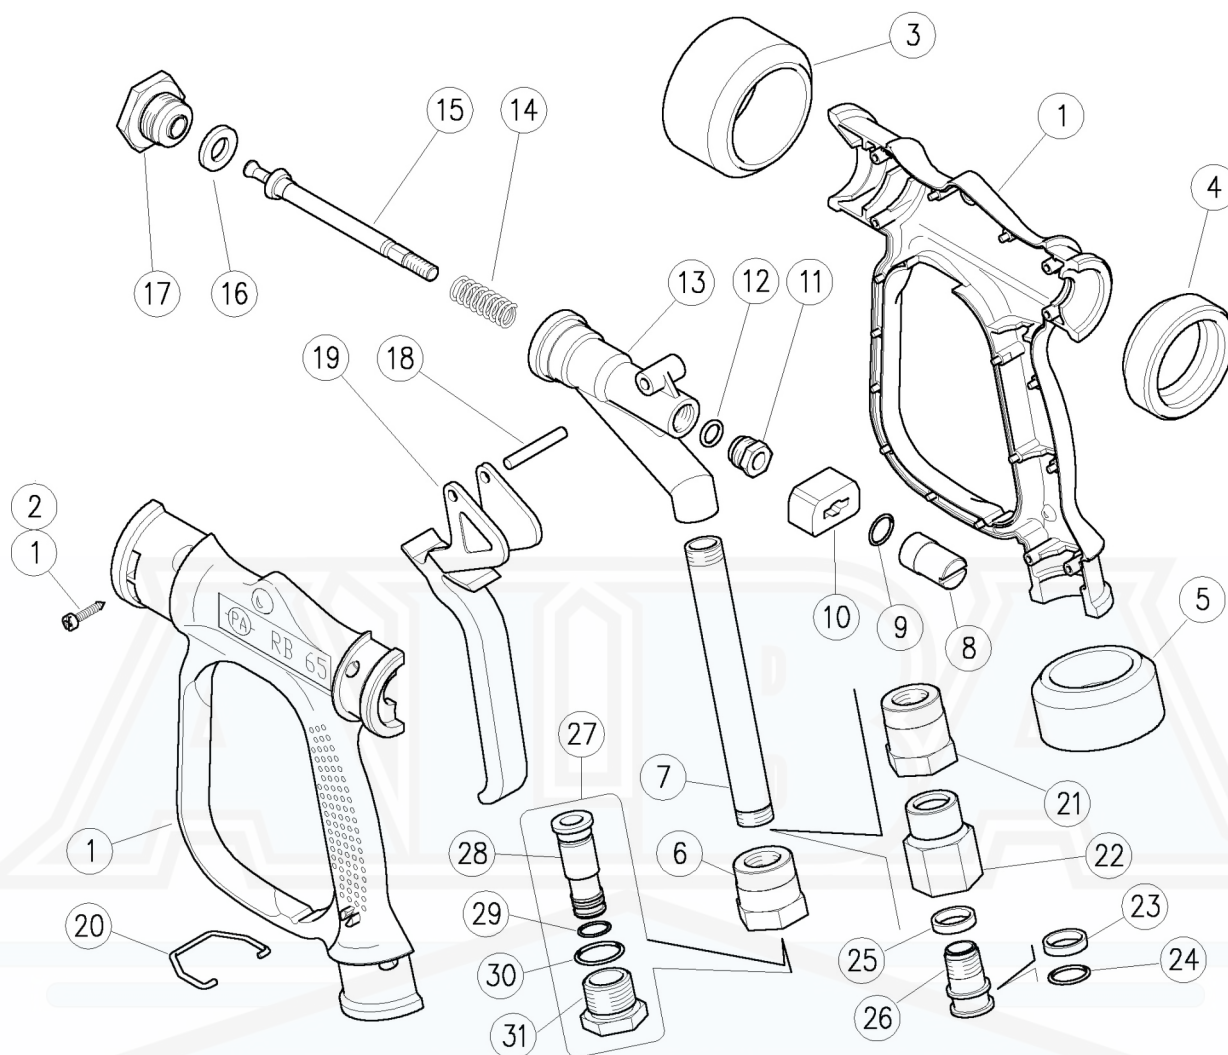

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
1	30.6420.24	Casing-kit -RB65-60L +screws, Sst. (1)	1					1
1	30.6446.24	Casing-kit -RB65-100L +screws, Sst. (2)	1					1
2	16.3075.51	S/tapping screw, DIN7981 3,5x18 mm Sst.	6					10
3	30.6412.84	Front guard ring, TPEs blue	1					5
4	30.6413.84	Back guard ring, TPEs blue	1					5
5	30.6414.84	Lower guard ring, TPEs blue	1					5
6	30.6407.31	Coupl., M16x1,5F-1/2F Bsp brass (1)	1					3
7	30.6409.36	Tube, M16x1,5 FF 130 mm brass	1					5
8	30.6418.31	Regulating pin, M7	1					5
9	10.3091.10	O-ring, 2x14 mm Vi 70	1	•	•	•		10
10	30.6404.84	Sliding block, PA blue (1)	1					5
10	30.6443.84	Sliding block, PA red (2)	1					5
11	30.6417.31	Plug, M14x1 M brass	1					5
12	10.3170.10	O-ring, 2,62x7,6 mm Vi 70	1	•	•	•		10
13	30.6405.35	Housing -RB65, brass	1					3
14	30.6410.51	Spring, 1,8x12,8x40 mm Sst.	1		•	•		10
15	30.6406.31	Piston -RB65, brass 60L/min (1)	1		•			5
15	30.6442.31	Piston -RB65, brass 100L/min (2)	1			•		5

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	
16	30.6408.85	Front seal, 11x20,5x3 mm FKM80	1	•	•	•		10
17	30.6403.31	Front Coupl. -RB65, brass 60L/min (1)	1					5
17	30.6441.31	Front coupl. -RB65, brass 100L/min (2)	1					5
18	30.6428.31	Parallel pin, 5x38 mm brass	1					5
19	30.6411.84	Trigger -RB65, PA blue (1)	1					10
19	30.6444.84	Trigger -RB65, PA red (2)	1					5
20	30.6415.51	Trigger retainer, Sst.	1					5
21	30.6426.31	Coupl. -SW, M15x1F-M16x1,5F (3)	1					3
22	30.6427.31	Coupl. -SW, 1/2F Bsp (3)	1					5
23	26.1075.85	Bushing, open 15,5x19x4 mm PTFE (3)	1					5
24	10.3092.10	O-ring, 2x15 mm Vi 70 (3)	1					10
25	26.1074.85	Bushing, 15,5x19x4 mm PTFE (3)	1					5
26	26.1072.31	Pin, M15x1-19 mm brass (3)	1					10
27	30.6430.00	Swivel, brass -RB65+13mm h.barb	1					10
28	30.6431.31	13mm hose barb, brass	1					1
29	10.3060.00	O-ring, 1,78x12,42 mm	1					10
30	10.3092.90	O-ring, 2x19 mm	1					10
31	30.6432.31	Coupl. -SW, 1/2M Bsp brass	1					3

Kit	P/N	Description	
K1	30.6422.24	Seals spares kit -RB65, 3x1pcs.	1
K2	30.6423.24	Repair kit -RB65-60L, 5x1pcs.	1
K3	30.6424.24	Repair kit -RB65-100L, 5x1pcs.	1

(1) 30.6400.00 (2) 30.6440.00 (3) 30.6425.00